


Product list of spherical roller bearing(24 series)

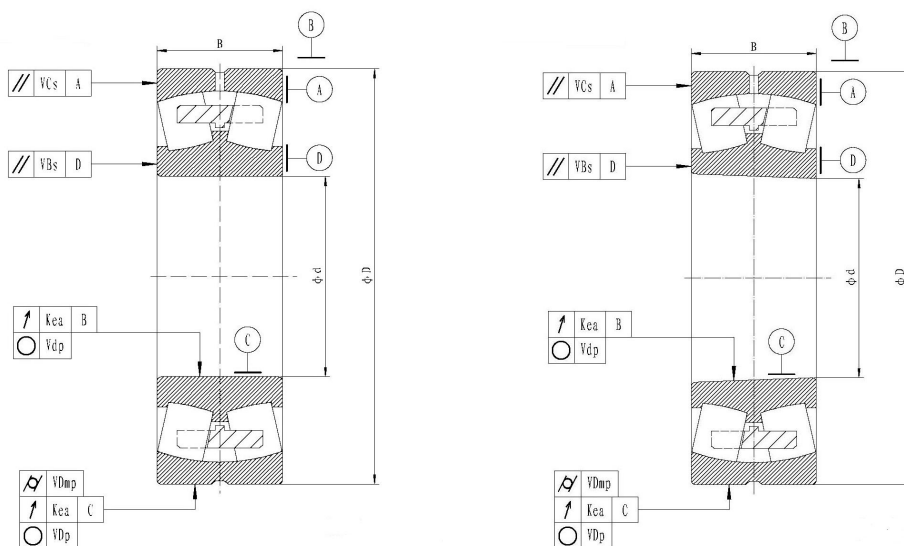

Bearing designation	Basic Dimension			limiting speed		rated load		RE.weight
	d	D	B	Grease	Oil	Cr	Cor	
24020CA	100	150	50	1900	2600	248	415	3.15
24120CA	100	165	65	1700	2200	455	640	5.65
24122CA	110	180	69	1600	2000	460	750	7.10
24122CAK	110	180	69	1600	2000	460	750	7.10
24024CA	120	180	60	1600	2000	430	670	5.45
24024CAK	120	180	60	1600	2000	430	670	5.45
24124CA	120	200	80	1400	1800	575	950	10.3
24124CAK	120	200	80	1400	1800	575	950	10.3
24026CA	130	200	69	1500	1900	540	815	8.05
24026CAK	130	200	69	1500	1900	540	815	8.05
24126CA	130	210	80	1300	1700	587	1000	11.0
24126CAK	130	210	80	1300	1700	587	1000	11.0
24028CA	140	210	69	1400	1800	570	900	8.55

24028CAK	140	210	69	1400	1800	570	900	8.55
24128CA	140	225	85	1100	1500	673	1160	13.5
24128CAK	140	225	85	1100	1500	673	1160	13.5
24030CA	150	225	75	1300	1700	655	1040	10.5
24030CAK	150	225	75	1300	1700	655	1040	10.5
24130CA	150	250	100	1000	1400	1020	1530	20.0
24130CAK	150	250	100	1000	1400	1020	1530	20.0
24032CA	160	240	80	1100	1500	750	1200	13.0
24032CAK	160	240	80	1100	1500	750	1200	13.0
24132CA	160	270	109	950	1300	1040	1760	25.0
24132CAK	160	270	109	950	1300	1040	1760	25.0
24034CA	170	260	90	1000	1400	930	1460	17.5
24034CK	170	260	90	1000	1400	930	1460	17.5
24134CA	170	280	109	900	1200	1220	1860	27.5
24134CAK	170	280	109	900	1200	1220	1860	27.5
24036CA	180	280	100	950	1300	937	1730	23.0
24036CAK	180	280	100	950	1300	937	1730	23.0
24136CA	180	300	118	900	1200	1400	2160	34.5
24136CAK	180	300	118	900	1200	1400	2160	34.5
24038CA	190	290	100	950	1300	978	1800	24.5
24038CAK	190	290	100	950	1300	978	1800	24.5
24138CA	190	320	128	850	1100	1600	2500	43.0
24138CAK	190	320	128	850	1100	1600	2500	43.0
24040CA	200	310	109	900	1200	1130	2120	31.0
24040CAK	200	310	109	900	1200	1130	2120	31.0
24140CA	200	340	140	800	1000	1800	2800	53.5
24140CAK	200	340	140	800	1000	1800	2800	53.5
24044CA	220	340	118	850	1100	1360	2600	40.0
24044CAK	220	340	118	850	1100	1360	2600	40.0
24144CA	220	370	150	750	950	2120	3350	67.0
24144CAK	220	370	150	750	950	2120	3350	67.0

24048CA	240	360	118	800	1000	1380	2700	43.0
24048CAK	240	360	118	800	1000	1380	2700	43.0
24148CA	240	400	160	670	850	2400	3900	83.0
24148CAK	240	400	160	670	850	2400	3900	83.0