


Implantation suivant A  
 Implantation according to A  
 Ansicht nach A

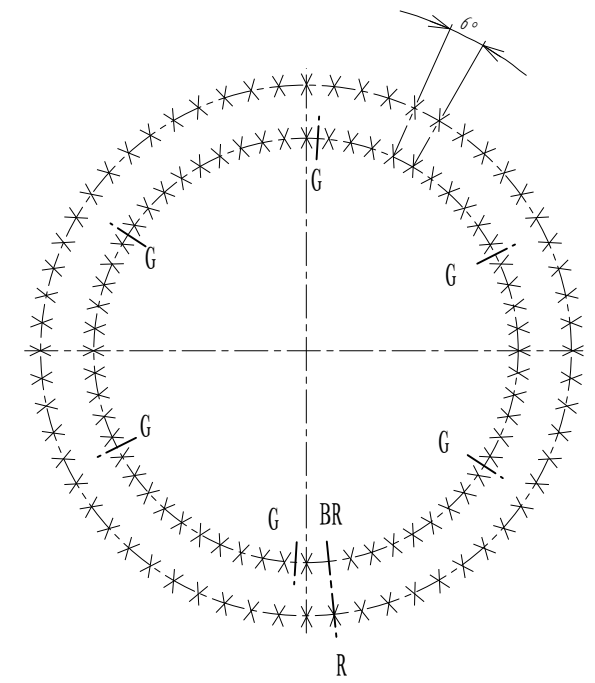

Denture - Gear - Verzahnung <b> Droite </b>	
Module <u>18</u>	Angle de pression <u>20°</u>
Module - Modul	Pressure angle
Diametral pitch <u>130</u>	Eingriffswinkel <u>2</u>
Nbr. de dents	Troncature - Kopfkürzung
Nr. of teeth - Zahnzahl	
Diamètre primitif <u>2340</u>	
Pitch diameter - Teilkreissdurchmesser	
Déport 2 m d <u>18</u>	
Add. mod. 2 m d - Profilverchiebung 2 m d	
Cote sur <u>15</u> dents <u>808,840</u>	
Measurement on teeth	
Zahnnessweite bei Zähnen <u>808,300</u>	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée <u>0.72</u>	Trempée <u>0.92</u>
No hardened	Hardened
Ungelärtet	Gelärtet

Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine Toleranzen nach IT-ETR-061				
X	R.E. O.R. A.R.	60	Trous de fixation Mounting holes Befestigungsborungen $\phi$ 33	equiv. equis.
	B.I. I.R.	60-1	Trous de fixation Mounting holes Befestigungsborungen $\phi$ 33	gl. Abst. equiv. equis.
G	R.E. O.R. A.R.		Trous de graisseurs Grease holes Schmierborungen	gl. Abst. equiv. equis.
	B.I. I.R. J.R.	6	Trous de graisseurs Grease holes Schmierborungen M 10 x 1.00	gl. Abst. equiv. equis.
B	Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway			
R	ca Stopfen - und heerteschlupf - position			

	Masse estimée <u>1163</u> kg Gewicht ca <u>1163</u> lbs Estimated weight
Des. _____	
Date. _____	
Ver. _____	
Date. _____	
Ech. _____	

N° <u>01-2130-00</u>
Indice <u>A</u>
Luoyang Jiecheng Bearing Technology Co., Ltd
Add: D1805, No.3 Lianmeng road, Luoyang, Henan, China. Postal: 471003 Phone: +86-379-68611678 Fa x: +86-379-68611679 E-mail: sales@jcb-bearing.com