



Implantation suivant A  
Implantation according to A  
Ansicht nach A

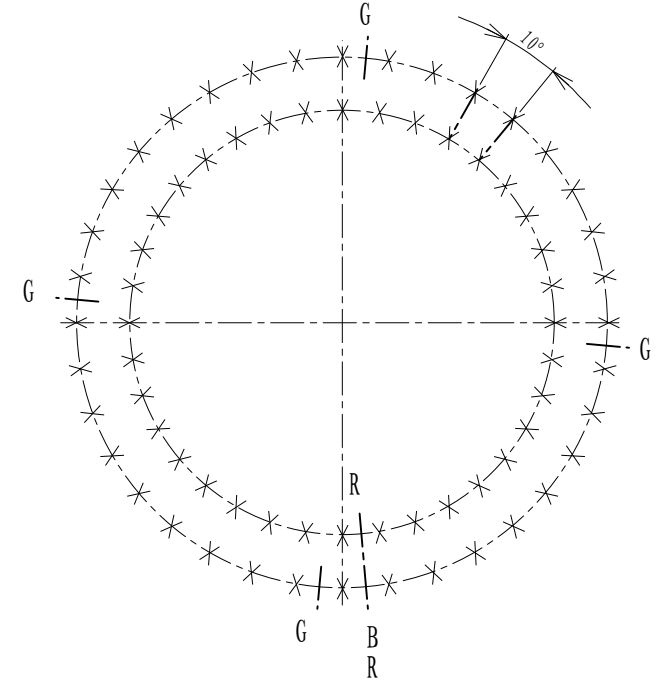

|   |   |
|---|---|
| Denture - Gear - Verzahnung   |   |
| <b> Droite </b>   |   |
| Module <u>8</u>   | Angle de pression <u>20°</u>                |
| Module - Modul  | Pressure angle                              |
| Diametral pitch <u>100</u>  | Eingriffswinkel <u>1</u>                    |
| Nbr. de dents   | Troncature - Kopfkürzung                    |
| Nr. of teeth - Zahnezahl  |   |
| Diamètre primitif <u>800</u>  |   |
| Pitch diameter - Teilkreissdurchmesser  |   |
| Déport 2 m d <u>8</u>   |   |
| Add. mod. 2 m d - Profilschiebung 2 m d   |   |
| Cote sur <u>12</u> dents <u>286.177</u>   |   |
| Measurement on teeth  |   |
| Zahnnessweite bei Zähnen <u>285.937</u>   |   |
| Faux rond au diamètre primitif - Run out on P.D.<br>Rundlauffehler am Teilkreis |   |
| Non trempée<br>No hardened<br>Ungehärtet <u>0.46</u>                            | Trempée<br>Hardened<br>Gehärtet <u>0.61</u> |

|  |  |
|--|--|
| Tolérances générales suivant IT-ETR-061<br>General tolerances according to IT-ETR-061<br>Allgemeine toleranzen nach IT-ETR-061 |  |
| X  | R.E. 36 Trous de fixation $\phi 22$ equid.   |
|  | O.R. 36 Mounting holes equis.  |
|  | A.R. 36 Befestigungsborengen gl. Abst.   |
|  | R.I. 36 Trous de fixation $\phi 22$ equid.   |
|  | O.R. 36 Mounting holes equis.  |
|  | A.R. 36 Befestigungsborengen gl. Abst.   |
| G  | R.E. 4 Trous de graisseurs <u>M 10 x 1,00</u> equid.   |
|  | O.R. 4 Grease holes <u>Lamés <math>\phi 20</math> prof. 12</u> equis.                        |
|  | A.R. 4 Schmierborungen gl. Abst.   |
|  | R.I. 4 Trous de graisseurs equid.  |
|  | O.R. 4 Grease holes equis.   |
|  | A.R. 4 Schmierborungen gl. Abst.   |
| B  | Position approximative du bouchon et du raccord de trempe                                    |
| R  | Filler plug and hardening connection of raceway<br>ca Stopfen - und heerteschlupf - position |



|       |  |
|-------|--|
| Des.  |  |
| Date. |  |
| Ver.  |  |
| Date. |  |
| Ech.  |  |

|   |                              |
|---|------------------------------|
| Masse estimée<br>Gewicht ca<br>Estimated weight | <u>171</u> kg<br><u></u> lbs |
|---|------------------------------|

|   |
|---|
| N° <u>02-0935-00</u>  |
| Indice <u>B</u>   |
| Luovang Jiecheng Bearing Technology Co., Ltd<br>Add: D1805, No. 3 Lianmeng road,<br>Luoyang, Henan, China. Postal: 471003<br>Phone: +86-379-68611678<br>Fa x: +86-379-68611679<br>E-mail: sales@jcb-bearing.com |