


Implantation suivant A  
 Implantation according to A  
 Ansicht nach A

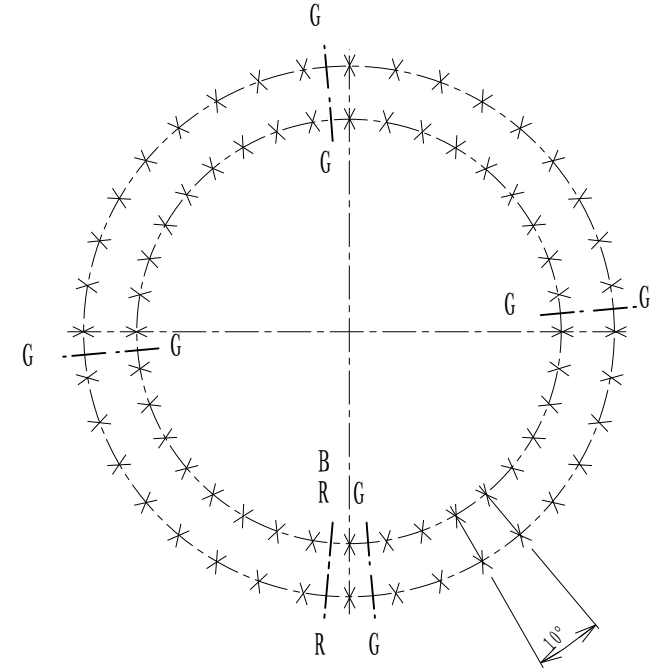

Denture - Gear - Verzahnung	
Droite	
Module <u>10</u>	Angle de pression <u>20°</u>
Module - Modul	Pressure angle
Diametral pitch	Eingriffswinkel
Nbr. de dents <u>111</u>	Troncature - Kopfkürzung
Nr. of teeth - Zahnezahl	
Diamètre primitif <u>1110</u>	
Pitch diameter - Teilkreissdurchmesser	
Déport 2 m d <u>16</u>	
Add. mod. 2 m d - Profilsverschiebung 2 m d	
Cote sur <u>13</u> dents <u>389.518</u>	
Measurement on teeth	
Zahnmessweite bei Zähnen <u>389.218</u>	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée <u>0.47</u>	Trempée <u>0.61</u>
No hardened	Hardened
Ungehärtet	Gehärtet

Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine Toleranzen nach IT-ETR-061					
X	B. E. Q. R. A. R.	36	Trous de fixation Mounting holes Befestigungsboreungen	$\phi$ 22	equiv. equiv. gl. Abst.
	B. I. I. R.	36	Trous de fixation Mounting holes Befestigungsboreungen	$\phi$ 22	equiv. equiv. gl. Abst.
	B. E. Q. R. A. R.	4	Trous de graisseurs Grease holes Schmierbohrungen	M 10 x 1.00	equiv. equiv. gl. Abst.
	B. I. I. R. J. R.	4	Trous de graisseurs Grease holes Schmierbohrungen	M 10 x 1.00	equiv. equiv. gl. Abst.
	B Position approximative du bouchon et du raccord de trempé Filler plug and hardening connection of raceway				
	R ca Stopfen - und heerteschlupf - position				

		Des. _____
		Date. _____
		Ver. _____
		Date. _____
		Ech. _____

Masse estimée <u>225</u> kg	N° <u>06-0980-09</u>
Gewicht ca _____ lbs	
Indice <u>B</u>	
Luoyang Jiecheng Bearing Technology Co., Ltd Add: D1805, No. 3 Lianmeng road, Luoyang, Henan, China. Postal: 471003 Phone: +86-379-68611678 Fa x: +86-379-68611679 E-mail: sales@jcb-bearing.com	

Masse estimée <u>225</u> kg Gewicht ca _____ lbs Estimated weight	
Indice <u>B</u>	
Luoyang Jiecheng Bearing Technology Co., Ltd Add: D1805, No. 3 Lianmeng road, Luoyang, Henan, China. Postal: 471003 Phone: +86-379-68611678 Fa x: +86-379-68611679 E-mail: sales@jcb-bearing.com	